

GENTEC Auto Manifold



Your Reliable Alternative

KUMAI series automatic system is designed for a continuous supply of high purity, welding or corrosive gases. It consists of a primary bank and a reserve bank of cylinders. Because of the differential pressure between the primary and reserve banks, the changeover takes place automatically when the primary bank is depleted to provide a continuous supply of gas from the reserve bank.

Features


- Pressure switch control
- Suitable for flammable gases
- With alarm system
- 316L Brass Chromed.



Gas type	Max. Inlet Pressure (psig)	Delivery Pressure (psig)	Max. Delivery Flowrate (cmh)
Oxygen (O ₂)	3000	10~200	100
Acetylene (C ₂ H ₂)	400	2~15	20
Carbon Dioxide (CO ₂)	3000	5~125	60
Argon, Nitrogen (Ar, N ₂)	3000	10~200	100

Standard design

- 36" (914mm) flexible high pressure stainless steel or copper pigtails
- For acetylene, system shall complete with flash Back Arrester which could sustain high flowrate
- For CO₂ application, system shall complete with heater
- Flexible pigtails are made from high pressure stainless steel complete with safety line for extra safety

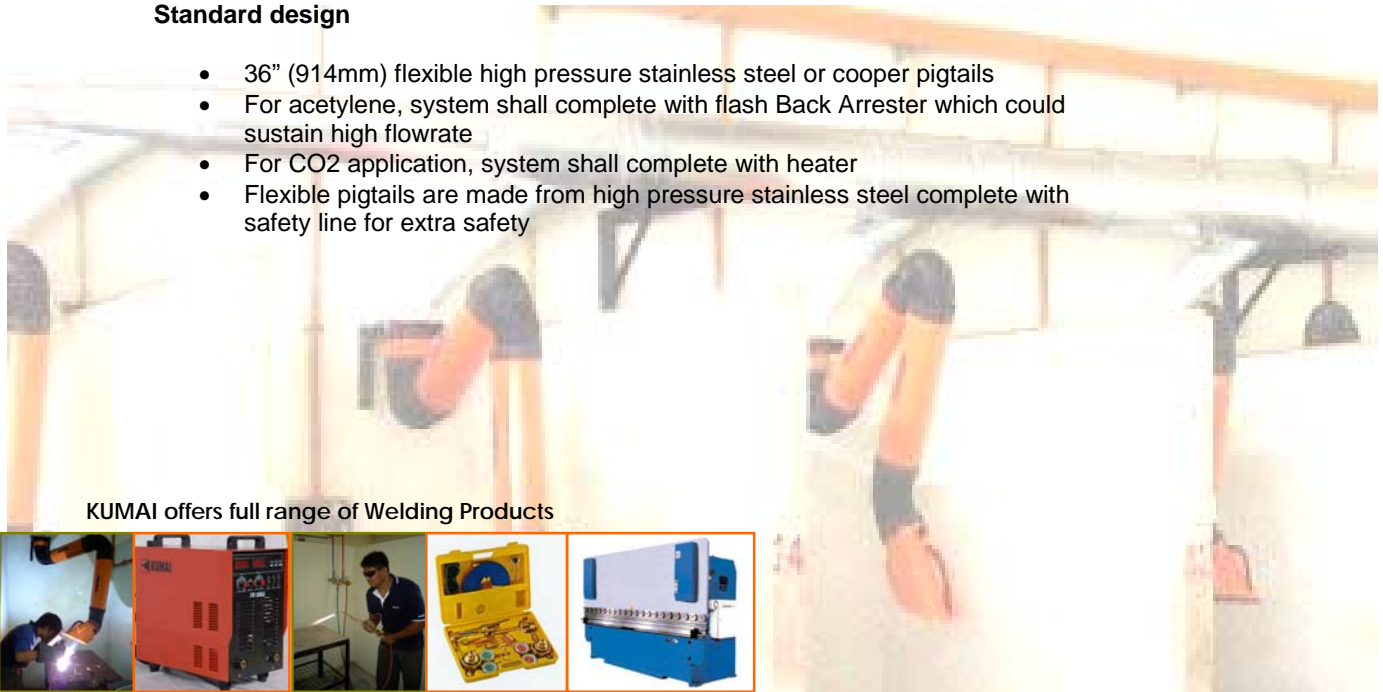

KUMAI offers full range of Welding Products

